

HEAVY DUTY FLANGED BRACKET PE



141

Accessories Mounting **Brackets**

Set of brackets for mounting a drum motor or an idler pulley

Product Description


Application

- ✓ For drum motors 113i, 138i, 165i and corresponding idler pulleys
- ✓ Only for drum motors with a cross drill thread in the front shaft (non cable / terminal box side)
- ✓ For drum motors with cable connectors or terminal
 ✓ Only for idler pulleys with a threaded hole in each shaft end

Note: For threaded shaft dimensions refer to the dimensional drawings for the respective drum motor.

Mounting Overview

Brackets must be mounted in the following way:



Product Range

One set of brackets comprises of one left-hand bracket and one right-hand bracket.

Drum Motor	Idler Pulley	Bracket set	Material	Electrical connector	Art. No.
113i		A + B	PE	Elbow connector Straight connector Terminal box	61006805
113i		A + B	PE	Cable slot connector	61008697
138i		A + B	PE	Elbow connector Straight connector Terminal box	61008702
138i		A + B	PE	Cable slot connector	61100570
	113i	B+C	PE		61008700
	138i	B + C	PE		61008705

Dimensions

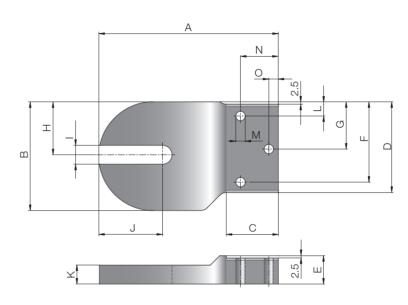


Fig.: Right-hand side bracket (A) for drum motor with elbow connector, straight connector or terminal

Drum	Α	В	С	D	E	F	G	Н	ı	J	K	L	М	N	0
Motor	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm		mm	mm
113i	190.0	115.0	55.0	96.0	30.0	85.0	50.0	56.0	20.0	67.5	20.0	15.0	M8	40.0	10.0
138i	200.0	140.0	55.0	121.0	30.0	110.0	62.5	67.0	20.0	80.0	20.0	15.0	M10	40.0	10.0

Refer to the Planning Section from p 158 for help with planning and design Accessories Overview p 128 Options p 104



HEAVY DUTY FLANGED BRACKET PE

Accessories
Mounting
Brackets

143

Set of brackets for mounting a drum motor or an idler pulley

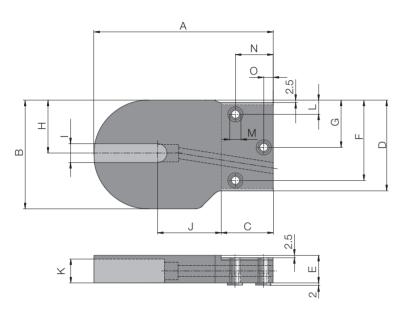


Fig.: Right-hand side bracket (A) for drum motor with cable slot connector

Drum Motor	A mm	B mm	C mm	-	E mm	F mm	G mm	H mm	I mm	J mm	K mm	L mm	М	N mm	O mm
113i	190.0	115.0	55.0	96.0	30.0	85.0	50.0	56.0	20.0	67.5	26.0	15.0	M8	40.0	10.0
138i	200.0	140 0	55.0	121 0	30.0	1100	62.5	67.0	20.0	65.0	26.0	15.0	M10	40.0	10.0

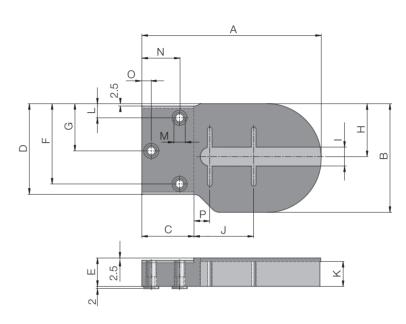


Fig.: Left-hand side bracket (B) for drum motor and idler pulley

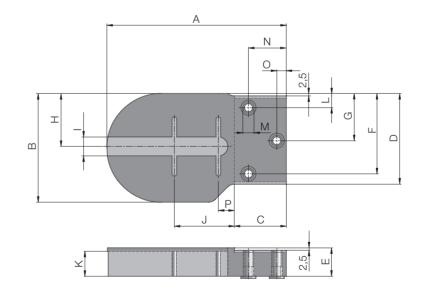


Fig.: Right-hand side bracket (C) for idler pulley

Drum Motor / Idler	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	l mm	J mm	K mm	L mm	М	N mm	O mm	P mm
Pulley																
113i	190.0	115.0	55.0	96.0	30.0	85.0	50.0	56.0	20.0	60.0	26.0	15.0	M8	40.0	10.0	17.5
138i	200.0	140.0	55.0	121.0	30.0	110.0	62.5	67.0	20.0	60.0	26.0	15.0	M10	40.0	10.0	15.0

142 Accessories Overview p 128 Options p 104 Refer to the Planning Section from p 158 for help with planning and design